


Abmessungen Speicherwassererwärmer (Behälter) VVI 150 - 1.000 2S

Typ	Speicherinhalt	H ISO	D Iso	H	D	a	b	c	d	e	1	2	3	4	5	6	7	Gewicht
	Liter	mm	mm	mm	mm	mm	mm	mm	mm	mm	" i.G.	" i.G.	" i.G.	" i.G.	" i.G.	" i.G.	Di/mm	kg
VVI 150	150	1.100	660	984	500	60	320	617	700	800	1	1	3/4	1	1	1/2	10	47
VVI 200	200	1.360	660	1.244	500	60	320	767	860	1.060	1	1	3/4	1	1	1/2	10	55
VVI 300	300	1.880	660	1.764	500	60	320	867	1.280	1.580	1	1	3/4	1	1	1/2	10	70
VVI 300 S	300	1.390	760	1.272	600	60	380	867	970	1.050	1	1	3/4	1	1	1/2	10	72
VVI 400	400	1.790	760	1.672	600	60	380	867	1230	1.450	1 1/4	1 1/4	3/4	1	1	1/2	10	82
VVI 500	500	1.600	910	1.481	750	60	410	870	1.080	1.210	1 1/4	1 1/4	3/4	1	1	1/2	10	90
VVI 750	750	2.100	910	2.010	750	60	440	895	1.380	1.740	1 1/2	1 1/2	3/4	1	1	1/2	10	109
VVI 500 2S	500	1.970	760	1.890	600	60	380	870	1.300	1.680	1 1/4	1 1/4	3/4	1	1	1/2	10	95
VVI 750 2S	750	1.830	960	1.750	800	60	440	895	1.230	1.490	1 1/2	1 1/2	3/4	1	1	1/2	10	114
VVI 1000 2S	1.000	2.300	960	2.220	800	60	450	895	1.590	2.000	1 1/2	1 1/2	3/4	1	1	1/2	10	175

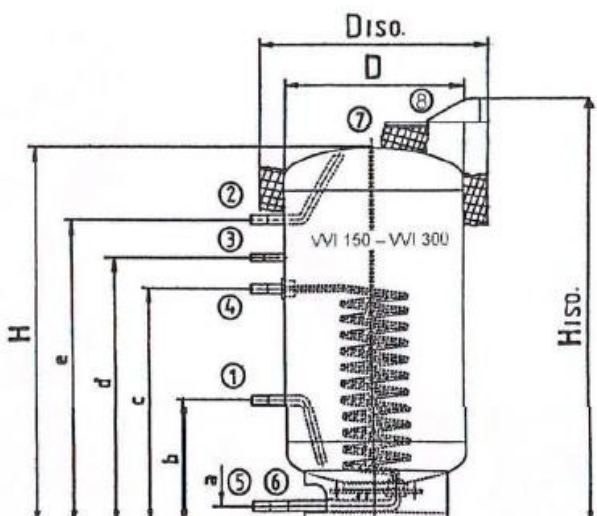

- 1 Kaltwasser
- 2 Warmwasser
- 3 Zirkulation
- 4 Heizungsvorlauf
- 5 Heizungsrücklauf
- 6 Entlüftung
- 7 Eingeschweißte
Edelstahltauchhülse
- 8 Schaltfeld

Wasserundwaerme.de
 Huuskoppel 13
 24321 Panker
 Fon. +49-(0)4381-4169461
 Fax. +49-(0)4381-4143078
 E-Mail: info@wasserundwaerme.de
 home: www.wasserundwaerme.de

